


Advantage -

1. Increase personal privacy
2. Better eye comfort
3. Great maintenance with less scratch
4. Long life indoor fabric from fading

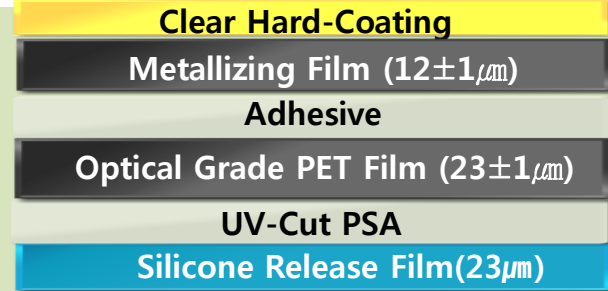

Visible Light Transmitted		9%	KS L 2016 ISO 9050
Visible Light Reflected	External	16.2%	KS L 2016 ISO 9050
	Internal	55.7%	
Solar Heat Reduction		67%	KS L 2016
Solar Heat	Reflected	27.1%	ISO 9050
	Absorbed	63.2%	
	Transmitted	9.7%	
IR Transmitted		10%	ISO 9050
UV Rejected		99%↑	KS L 2514 ISO 9050
Total Solar Energy Rejected (TSER)		75.8%	ISO 9050

Thickness	1.5Mil/2Ply	
Shading Coefficient	0.33	KS L 2016
Solar Heat Gain Coefficient (SHGC)	0.29	KS L 2514
Scratch Resistant	>2H	ASTM D3363
Haze	1.5%	ASTM D1003
Adhesion of Hard-Coated Surface	5B (0% peel-off)	ASTM D3359